ZXP6-60 Series

Znshinesolar 5BB Polycrystalline PV Module



Poly




270W | 275W | 280W | 285W | 290W | 295W


Made with selected materials and components to grant quality, duration, efficiency and through outputs, the ZXP6-60 polycrystalline modules by ZNSHINE SOLAR represent a highly flexible solution for diverse installation types, from industrial rooftop plants to small home PV systems or large ground surfaces. This allows you to produce clean energy while reducing your energy bill.

ZNSHINE SOLAR' S ZXP6-60 polycrystalline solar modules are tested and approved by international acknowledged laboratories, so that we can offer our customers a reliable and price-quality optimized product. The linear warranty on product outputs further ensures increased security and return on investments over time.

12 years product warranty/25 years output warranty

0.7% Annual Degradation over 25 years

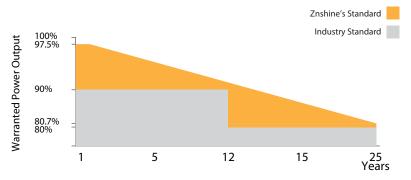

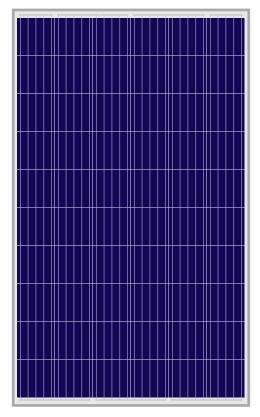



Tier 1 & Bankable

Well known trade mark in China; Tier 1 bankable brand globally



High Efficiency

Graphene coating can increase about 2W of the module efficiency by rising around 0.5% of the light transmission



Anti PID

Limited power degradation of ZXP6-60 module caused by PID effect is guaranteed under strict testing condition for mass production



Better Weak Illumination Response

Lower temperature coefficient and wide spectral response, higher power output, even under low-light settings



Certified to withstand the most challenging environmental conditions

5400 Pa snow load 2400 Pa wind load



Grahpene Coating

Graphene coating modules can increase power generation and self-cleaning, also can save maintainance cost































ELECTRICAL PROPERTIES | STC*

Module Type	ZXP6- 60-270/P	ZXP6- 60-275/P	ZXP6- 60-280/P	ZXP6- 60-285/P	ZXP6- 60-290/P	ZXP6- 60-295/P	
Nominal Power Watt Pmax(W)	270	275	280	285	290	295	
Power Output Tolerance Pmax(%)	0~+3	0~+3	0~+3	0~+3	0~+3	0~+3	
Maximum Power Voltage Vmp(V)	31.1	31.3	31.5	31.7	31.9	32.1	
Maximum Power Current Imp(A)	8.69	8.79	8.89	9.00	9.10	9.19	
Open Circuit Voltage Voc(V)	38.7	38.9	39.1	39.3	39.5	39.7	
Short Circuit Current Isc(A)	9.07	9.16	9.25	9.34	9.42	9.52	
Module Efficiency (%)	16.50	16.80	17.11	17.41	17.72	18.02	

^{*}STC (Standard Test Condition): Irradiance 1000W/m², Module Temperature 25°C, AM 1.5
*The data above is for reference only and the actual data is in accordance with the pratical testing

ELECTRICAL PROPETIES | NMOT*

Maximum Power Pmax(Wp)	199.7	203.3	207.1	211.2	215.2	218.1	
Maximum Power Voltage Vmpp(V)	29.1	29.3	29.5	29.7	30.0	30.0	
Maximum Power Current Impp(A)	6.87	6.95	7.03	7.11	7.17	7.26	
Open Circuit Voltage Voc(V)	35.6	35.8	36.0	36.2	36.3	36.5	
Short Circuit Current Isc(A)	7.34	7.42	7.49	7.56	7.63	7.71	

^{*}NMOT(Nominal module operating temperature):Irradiance 800W/m²,Ambient Temperature 20°C,AM 1.5,Wind Speed 1m/s
*The data above is for reference only and the actual data is in accordance with the pratical testing

TEMPERATURE RATINGS

NMOT	45℃ ±2℃
Temperature coefficient of Pmax	-0.40%/℃
Temperature coefficient of Voc	-0.31%/℃
Temperature coefficient of Isc	0.06%/℃

^{*}Do not connect Fuse in Combiner Box with two or more strings in parallel connection


WORKING CONDITIONS

Maximum system voltage	1500 V DC
Operating temperature	-40°C~+85°C
Maximum series fuse	15 A
Maximum load(snow/wind)	5400 Pa / 2400 Pa

MECHANICAL DATA

Solar cells	Poly 156.75×156.75 mm
Cells orientation	60 (6×10)
Module dimension	1650×992×35 mm
Weight	18.5 kg
Glass	High transparency,low iron,tempered
	Glass 3.2mm (AR-coating)
Junction box	IP 68, 3 diodes
Cables	4 mm² ,900 mm
Connectors	MC4-compatible

DIMENSION OF THE PV MODULE (mm)



PACKAGING INFORMATION

Packing Type	40' HQ
Piece/Box	30
Piece/Container	840

I-V CURVES OF THE PV MODULE

